



Fixed and Variable Speed Rotary Screw Compressors

R-Series 4-11 kW (5-15 hp)



More Than 145 Years of Compressed Air Innovation



Ingersoll Rand introduced its first air compressor in 1872. Over the next 145 years, we have continued to develop rugged, reliable, industry-leading rotary screw compressor technologies. No matter what the application, Ingersoll Rand rotary screw technology provides clean, dry air in all operating conditions to meet your specific performance needs, reduce costly downtime and maximize your productivity.

Compact Performance

The durable Ingersoll Rand R-Series 4-11 kW compressor extends the R-Series family into the smallest rotary screw offering with benefits like innovative features and a **compact design that fits virtually any application environment.**

Enhanced Reliability

- TEFC Tri-Voltage (208-230/460 V) motor allows the unit to adapt to each voltage for all customers
- Danfoss drive (VSD models) provides world-class reliability, eliminating overheating and related component failures
- V-Shield™ technology uses premium PTFE hoses on all oil-carrying lines as well as O-ring face seal connections, virtually eliminating leaks and increasing hose life
- Power Outage Restart Option (PORO) safely restores the machine to previous settings following power interruption
- Improved cooler design minimizes thermal expansion stresses

Increased Efficiency

- IE3 premium energy-efficient motors support continuous operation in harsh environments
- Next-generation leak-free airends feature significantly improved turndown performance for variable speed units

Compact Productivity

- Vertically stacked drive components reduce the overall basemount footprint by 20% compared to previous models, improving balance and simplifying belt tension
- The R-Series Total Air System (TAS) provides clean, dry air in a single package that minimizes installation costs, space and features improved ISO air quality
- Whisper-quiet operation as low as 69 dBA allows for installation closer to point of use, reducing costs and ensuring a better, safer work environment

Intelligence

- Xe-Series programmable controllers deliver increased control functionality through an intuitive user interface, allowing for easy access to all critical operating parameters
- Optional built-in event logging and trip history allow for greater machine usability and peace of mind

Proven Reliability. Robust Design.

The R-Series 4-11 kW family of compressors delivers optimum performance and easier maintenance, all in a robust, innovative package.



The Xe-Series controllers deliver increased control functionality through an intuitive user interface with large navigation buttons for both fixed and variable speed drives



A totally integrated, leak-free design uses PTFE stainless steel braided hoses



Vertically-stacked drive components allow for easy maintenance



The all-in-one airend features superior air/oil separation and reliability

Convenient Choices for a Complete Air Solution

Clean, Dry Air

Drying the compressed air to remove moisture and contaminants prevents damage to finishing processes or product quality.



TAS (Total Air System)

- A** 3-in-1 heat exchanger
- B** High-efficiency and general purpose filters
- C** Condenser
- D** Reliable refrigerant compressor
- E** Cyclon water separator

TAS—The Total Package

To provide the most comprehensive air solution, our Ingersoll Rand R-Series compressors are available with a Total Air System (TAS) option. These complete compressor and dryer systems come with integrated controls, water separators, drain ports and filters. For any capacity you need, let Ingersoll Rand provide the complete answer in a compact solution that fits your air requirements and workspace.

- General purpose and high-efficiency filters with integrated dryer deliver class-leading ISO 1-5-1 quality air
- 3-in-1 heat exchanger provides increased reliability and efficiency
- All new dryer design with unprecedented reliability minimizes installation costs with a single-point power connection



Total Air System—Dryer Operation

The onboard dryer controller is integrated into the TAS package such that the dryer cycling is controlled by the compressor operation, and dryer alarms are fed back to the compressor controller. The dryer controller also allows for adjustment of critical operating parameters, saving you time and ensuring peace of mind.

Ensuring Optimal Uptime

Xe-50M vs. Xe-70M Features



Xe-50M



Xe-70M

Feature/Option	Xe-50M	Xe-70M
Display	2.1" monochrome	2.6" 240 x 160 monochrome
Total I/O	11	23
RS-485 communication port	0	2
Ethernet port	No	Yes (optional ECO)
Data collection (SD collection card)	No	7 days (optional ECO)
Start/stop control	✓	✓
Manual load/unload control	✓	✓
Automatic load control (auto-restart)	✓	✓
Lead/lag		✓
Blower control		✓
Power out restart option (PORO)		✓
Integrated dryer control	✓	✓
Language	Symbolic	Text, over 30 languages

Productivity is enhanced due to advanced diagnostics, automated data logging, report generation and compressor sequencing.

Fixed and Variable Speed Drive Options

Features Description	Fixed Speed	Variable Speed
Xe-Series 50 controller	●	
Xe-Series 70 controller	○	●
Total Air System (TAS) with integrated dryer	○	○
Power outage restart option (PORO)	○	○
High ambient option	○	
Outdoor modification enclosure	○	
Ultra FG or Ultra EL coolant	○	○
Hi-dust air filter	○	
Low voltage (208-230 V)	●	○
Receiver tank size (80/120 gallon)	○	○

● Standard Feature ○ Optional Feature "Blank" Not Available

*Available with ECO option **Can only use one at a time due to shared port

Compressor Specifications


i Ingersoll Rand Fixed Speed – 60 Hz Performance										
Model	Max. Pressure		Nominal Power		Capacity (FAD)*		Dimensions		Weight (Air-cooled)	
	psig	kW	hp	cfm	Length x Width x Height		kg	lb		
R4i	110	4.0	5.0	19.4	millimeters 960 x 690 x 1,186.5 inches 38 x 27 x 47		280	617		
R4i	125	4.0	5.0	16.9			280	617		
R4i	145	4.0	5.0	14.3			280	617		
R5.5i	110	5.5	7.5	30.5			280	617		
R5.5i	125	5.5	7.5	27.5			280	617		
R5.5i	145	5.5	7.5	24.3			280	617		
R5.5i	200	5.5	7.5	16.8			280	617		
R7.5i	110	7.5	10.0	39.8			280	617		
R7.5i	125	7.5	10.0	36.7			280	617		
R7.5i	145	7.5	10.0	33.4			280	617		
R7.5i	200	7.5	10.0	25.3			280	617		
R11i	110	11.0	15.0	57.5			295	650		
R11i	125	11.0	15.0	56.1			295	650		
R11i	145	11.0	15.0	50.4			295	650		
R11i	200	11.0	15.0	41.5			295	650		
i Ingersoll Rand Fixed Speed TAS – 60 Hz Performance										
R4i TAS*	110	4.0	5.0	19.4	millimeters 1,156 x 690 x 186.5 inches 46 x 27 x 47		345	761		
R4i TAS*	118	4.0	5.0	16.9			345	761		
R4i TAS*	138	4.0	5.0	14.3			345	761		
R5.5i TAS*	110	5.5	7.5	30.5			345	761		
R5.5i TAS*	118	5.5	7.5	27.5			345	761		
R5.5i TAS*	138	5.5	7.5	24.3			345	761		
R5.5i TAS*	193	5.5	7.5	16.8			345	761		
R7.5i TAS*	110	7.5	10.0	39.8			345	761		
R7.5i TAS*	118	7.5	10.0	36.7			345	761		
R7.5i TAS*	138	7.5	10.0	33.4			345	761		
R7.5i TAS*	193	7.5	10.0	25.3			345	761		
R11i TAS*	110	11.0	15.0	57.5			365	805		
R11i TAS*	118	11.0	15.0	56.1			365	805		
R11i TAS*	138	11.0	15.0	50.4			365	805		
R11i TAS*	193	11	15.0	41.5			365	805		
n Ingersoll Rand Variable Speed TAS – 60 Hz Performance										
Model	Max. Pressure		Nominal Power		Capacity (FAD) @ 100 psi		Dimensions (Length x Width x Height)		Weight (Air-cooled)	
	psig	kW	hp	cfm	mm		in		kg	lb
R5.5n	65-145	5.5	7.5	13.6-32.1	960 x 690 x 1,186.5	38 x 27 x 47	285	628		
R7.5n	65-145	7.5	10.0	14.7-41.7	960 x 690 x 1,186.5	38 x 27 x 47	285	628		
R11n	65-145	11.0	15.0	13.9-59.8	960 x 690 x 1,186.5	38 x 27 x 47	305	672		
R5.5n TAS*	65-135	5.5	7.5	13.6-32.1	1,156 x 690 x 1,186.5	46 x 27x47	350	772		
R7.5n TAS*	65-135	7.5	10.0	14.7-41.7	1,156 x 690 x 1,186.5	46 x 27x47	350	772		
R11n TAS*	65-135	11.0	15.0	13.9-59.8	1,156 x 690 x 1,186.5	46 x 27x47	375	827		
Receiver Tank	Length mm		Width		Height		Additional Mass			
	mm	in	mm	in	mm	in	kg	lb		
	80 gal tank-mounted version	1,783	70	690	27	1,704	67	120	264.5	
120 gal tank-mounted version	1,897	75	690	27	1,832	72	142	313.0		

*FAD (Free Air Delivery) is full package performance including all losses. Tested per ISO 1217 : 2009 Annex C and is measured at 10 psi lower than maximum pressure on non-TAS units and at maximum pressure on TAS equipped units.

*TAS units deliver ISO Class 1-5-1 quality air measured at steady state conditions in accordance with ISO 8573-1:2001 that dictates inlet air to package of 25°C (77°F) and relative humidity of 60%.

Your Trusted Partner in Compressed Air

Optimize your total **Cost** of ownership, while maximizing **Availability**, **Reliability** and **Efficiency** throughout the life of your compressed air system with our Lifecycle CARE services.

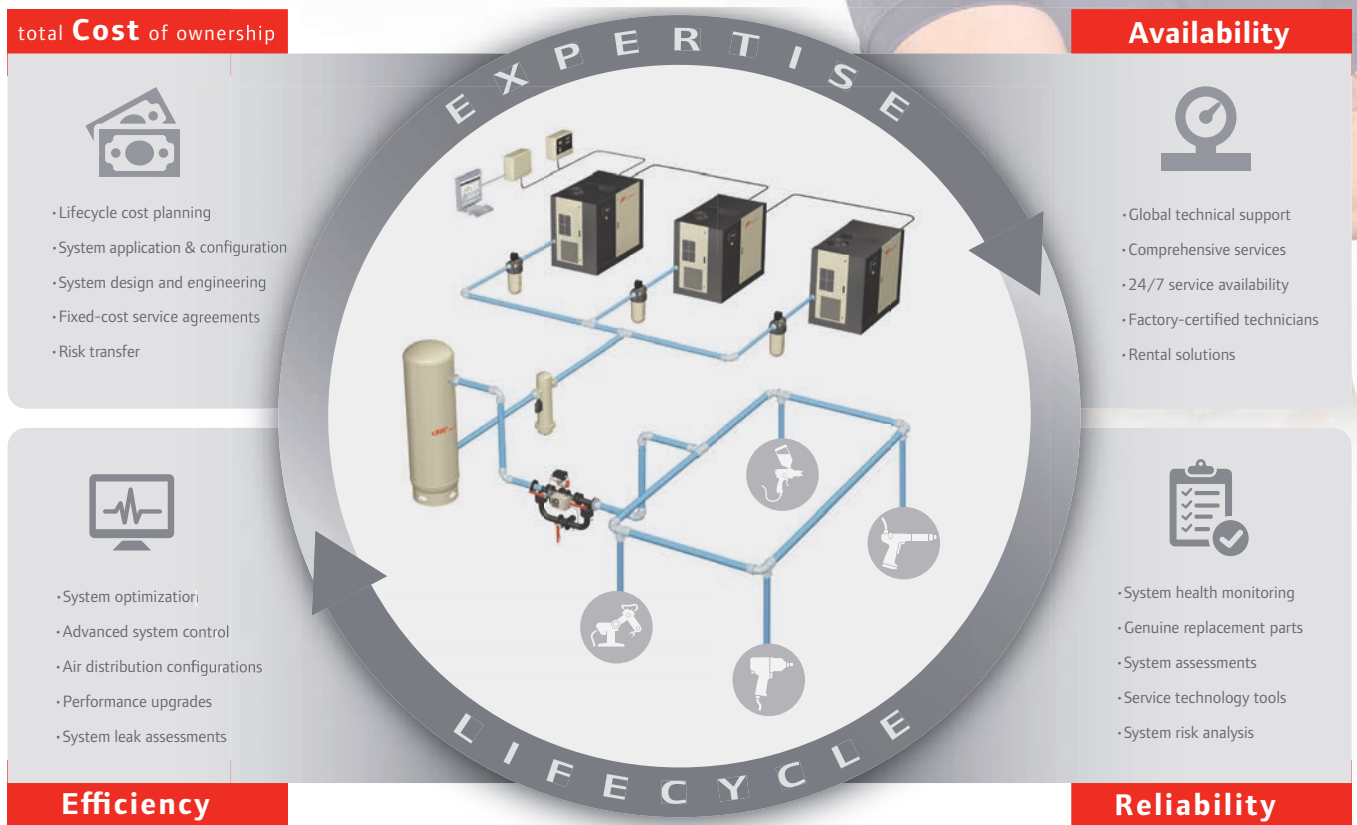

Design • Install • Commission • Operate • Maintain • Extend

PackageCARE™...eliminate the inconvenience

No matter where your facility is located, Ingersoll Rand is committed to serving you 24 hours a day, seven days a week, available to support you with innovative and cost-effective service solutions that will keep you running at peak performance. Let Ingersoll Rand handle the pressures and responsibilities of owning a compressed air system with our signature service contract.





Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$13 billion global business committed to a world of sustainable progress and enduring results.



www.ingersollrandproducts.com

Distributed by:



Member of Pneurop



Ingersoll Rand, IR, the IR Logo, V-Shield and PackageCARE are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners.

Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Any designs, diagrams, pictures, photographs and specifications contained within this document are for representative purposes only and may include optional scope and/or functionality and are subject to change without notice or obligation.